





CONFIGURATIONS








GLASS THICKNESS | GLAZING TYPE







TEMPERED GLASS





Solid Extruded Rails




1-3/16" Narrow Stiles That are 1-3/4" thick




Bottom Rail is PL-1000 10" for ADA compliance.

PRL Panic Device.




STRONGER

Tested to 2.0 million cycles






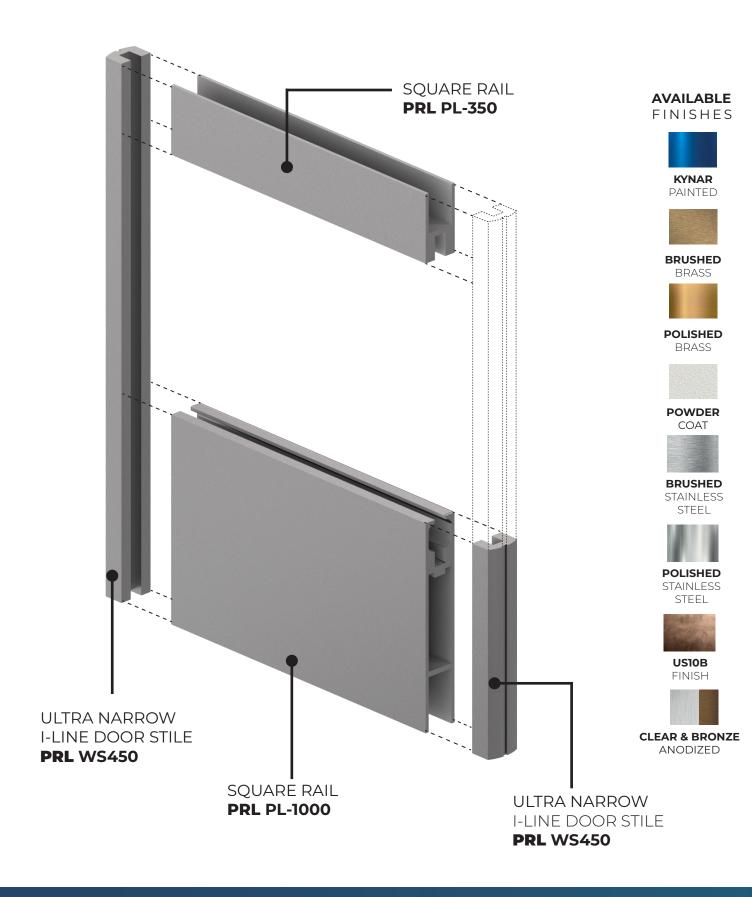

ULTRA NARROW STILE DOOR



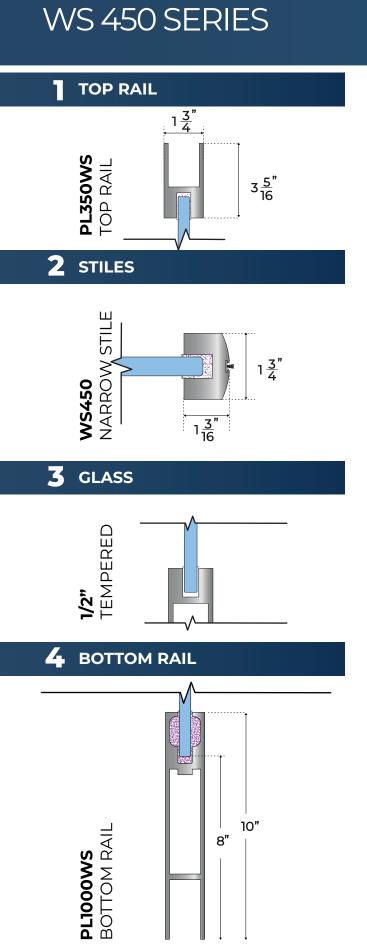








PANIC HANDLE PL-100F-ADA SERIES

F style handle is a full height tubular bar, constructed from 1 ¼" diameter tubing, which runs from the top to the bottom of the door in line with the panic device's vertical rod.

The F style pull not only gives all glass doors an elegant appearance but also reduces deflection and adds rigidity to the glass. For this reason the F style exterior pull handle is frequently used on taller glass doors.

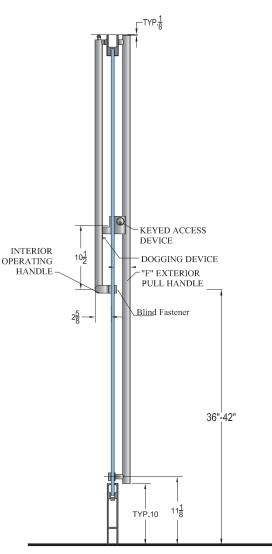

MATERIAL:

1-1/4" Stainless Steel Tubing Glass Thickness: 1/2" 3/8" 5/8" 3/4"

CERTIFICATION:

ANSI/BHMA A156.3-2008 GRADE 1 UL 305 CERTIFIED

AVAILABLE FINISHES:

#4 Brushed Stainless Steel #8 Polished Stainless Steel Polished Brass Satin Brass US10B or Powder Coated, Custom Finishes Available





VERTICALCUT

SECTION (NON CLADDED)

